
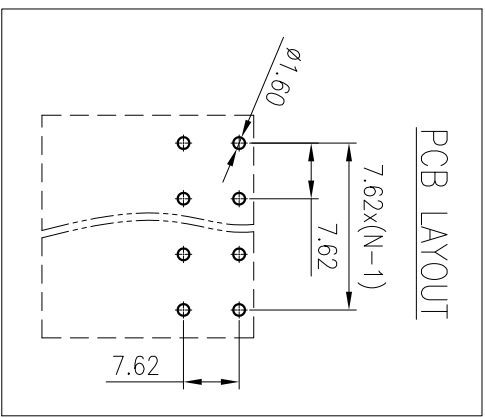

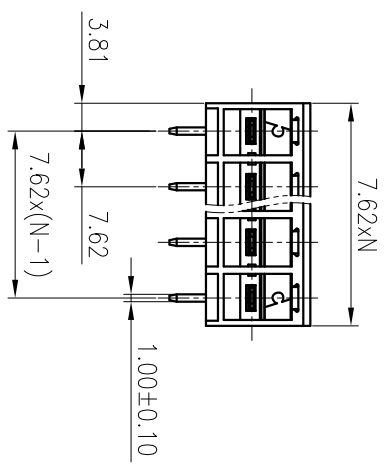



公差/General tolerances(mm)		0.1/10
0	>3	~
3	~6	~
6	~10	~
10	~18	~
18	~30	~
30	~50	~
50	~80	~
80	~120	~
120	~180	~
180	~250	~
250	~315	~
315	~400	~
400	~500	~
500	~500	~
±0.12	±0.18	±0.22
±0.22	±0.28	±0.31
±0.31	±0.37	±0.57
±0.57	±0.80	±0.93
±0.93	±1.05	±1.15
±1.15	±1.60	±2.20
±2.20	±2.50	±2



PCB LAYOUT

2	Pin header	Copper	Sn Plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B C D	
额定电压/电压/Rated Voltage(V)/Current(A)		300/30 300/30 300/10	
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		/	III/2
额定电压/电压/Rated Voltage(V)/Current(A)		/	400/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4
间距/Pitch(mm)/线数范围/Poles		7.62/N=02~12P	
使用温度范围/Operating temperature(°C)			-40~+110
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRFT: CenMZ 2020.06.10

NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 10001535

TYPE: CUSTOMER DRAWING SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE