
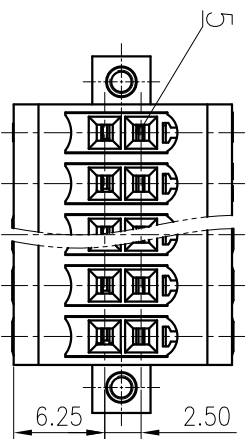
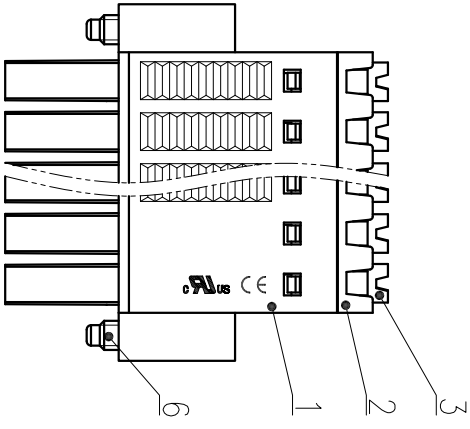
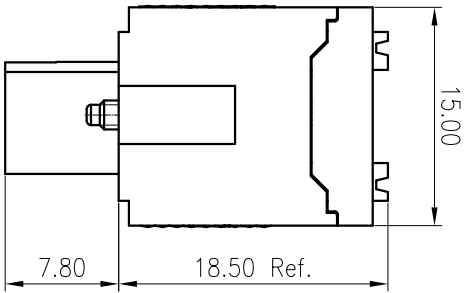
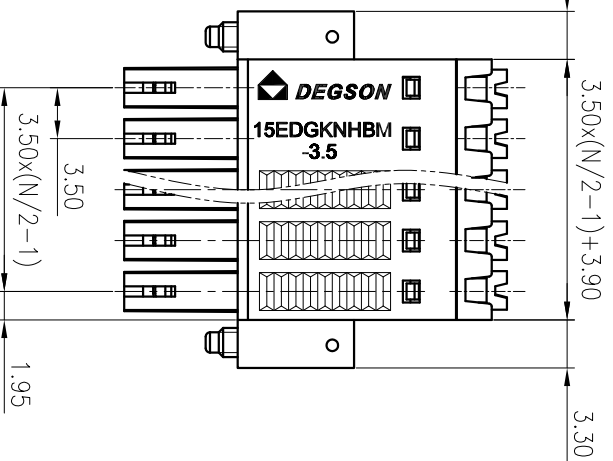


公差表/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	3	6	10	18	30	50	80	120	180	250	315	400	500	~	~
+0.12	+0.18	+0.22	+0.26	+0.31	+0.37	+0.57	+0.80	+0.93	±1.05	±1.15	±1.60	+2.20	+2.50	±2.50	±2	

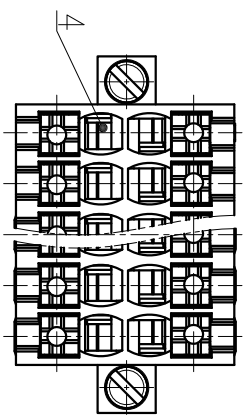

ITEM	PART NAME	MATERIAL	NOTES
6	Screw	Steel	Zn Plated
5	Clamp	Copper alloy	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66-GF	UL94V-0
2	Cover	PA66-GF	UL94V-0
1	Housing	PA66-GF	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)	Current(A)	300/710	50/710	300/710
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)	160/13.4/160/13.4/820/13.4			
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5	
导体范围(硬导线/软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~1.5/28~16			
间距/Pitch(mm)/线数范围/Poles	3.50/N=04~48P			
剥线长度/Stripping length(mm)	10~11			
使用温度范围/Operating Temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.04
 CHKD: Ma EK 2020.06.04
 DRFT: Lee 2017.03.30

NAME: 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

15EDGKNHBM-3.5-XXP-1Y-00A(H)
 DRAWING NO.:15EDGKNHBM-3.5-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
1	2	3	4	5

SIZE: A4	SCALE: 2:1	REV	REV
(mm)	(inch)	1/1	1/1