
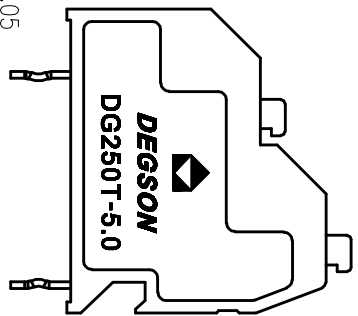
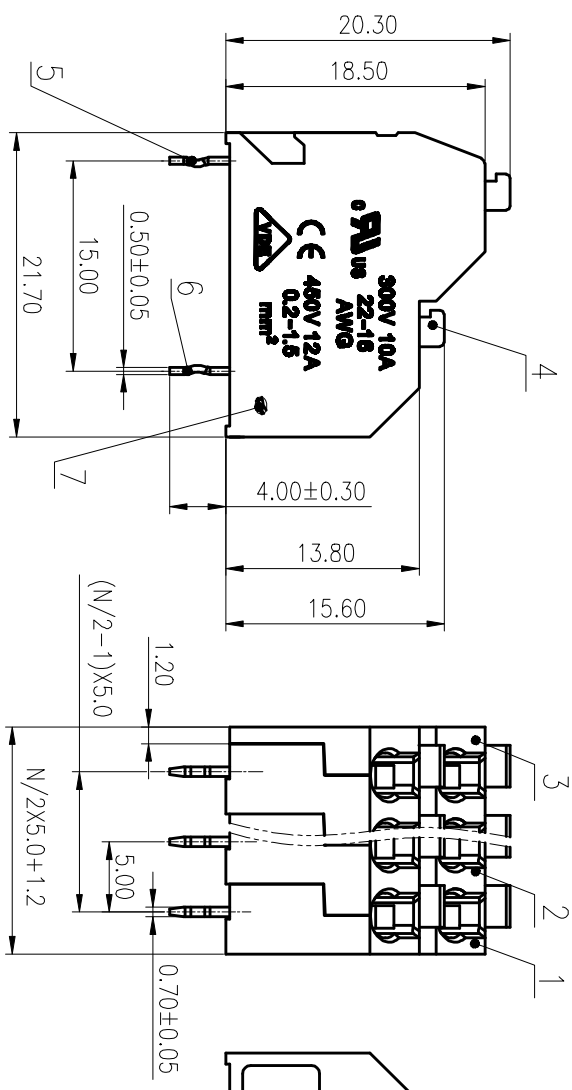
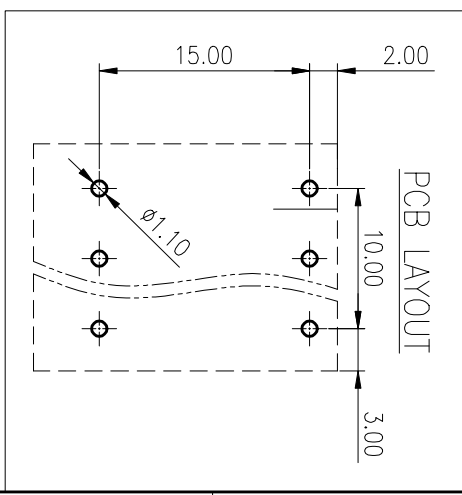


公差等级/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	±Z	±Z	±Z	±Z



ITEM	NAME OF PART	MATERIAL	NOTES
7	Spring	Stainless steel	
6	Short pin	Copper alloy	Sn plated
5	Long pin	Copper alloy	Sn plated
4	Button	PA66	UL94V-0
3	Left cover	PA66	UL94V-0
2	Housing	PA66	UL94V-0
1	Right cover	PA66	UL94V-0

UL 标准	UL Standard:	B	/	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	/	300/10
IEC 标准/IEC Standard:				
IEC 类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2	
额定电压/电涌/Rated Voltage(V)/Current(A)	/	450/12	/	
工频耐压/Withstanding Voltage(V)/Min	/	AC2500	/	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~1.5/22~16			
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P			
引线长度/Stripping length(mm)	9~10			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

MATERIAL: /
SURFACE: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

MAT NO.:	/	NAME:	DG250T-5.0-XXP-1Y-00A(H)
STATUS:	/	DRAWING NO.:	DG250T-5.0-C01
APPD: LIGL	2020.05.27	TYPE:	CUSTOMER DRAWING
CHKD: Mek	2020.05.27	SCALE:	2:1
DFT: LuoXM	2020.05.27	REV	T7
REV	ECN	DESCRIPTION	SHEET
			1/1

REV	ECN	DESCRIPTION	DFT	DATE
1	2	3	4	5

REV	ECN	DESCRIPTION	DFT	DATE
1	2	3	4	5