

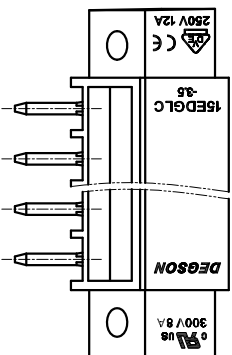
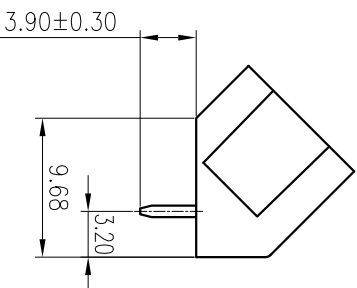
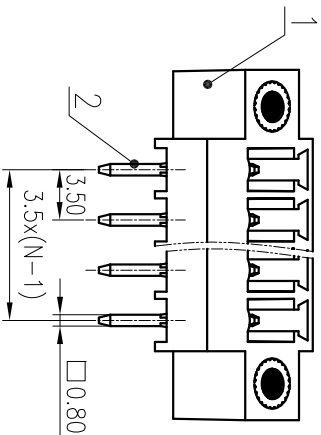
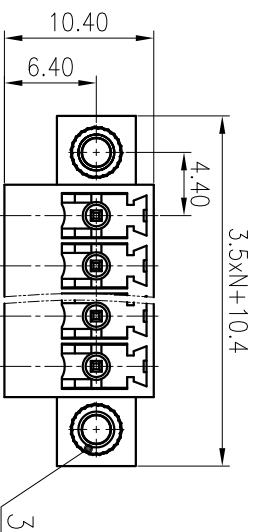


未注公差/General Tolerances(mm)		0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±0.1
±0.17	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±2.50	±0.1

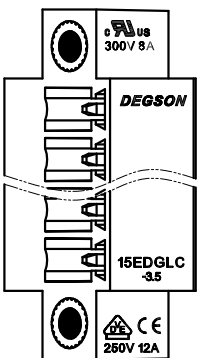

ITEM	NAME OF PART	MATERIAL	NOTES
3	Nut	Copper Alloy	
2	Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0

PCB LAYOUT

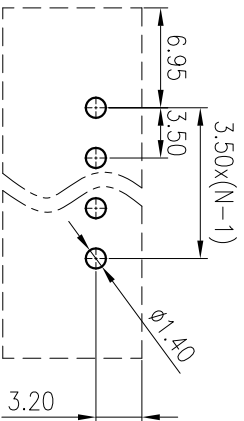

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE	SCALE	SHEET
1	2	3	4	5	6	7	8

MATERIAL:	
MAT NO.:	
STATUS:	
APPD:	Lgn CHH 2020.05.22
CHKD:	Yu JZh 2020.05.22
DRAFT:	CZ 2017.09.04
DRAWING NO.:	15EDGLM-3.5-C01
TYPE:	CUSTOMER DRAWING

NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.:	15EDGLM-3.5-XXP-1Y-00A(H)
REV	T1
SHEET	1/1

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2		
额定电压/电流/Rated Voltage(V)/Current(A)	250/12		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5		
可距/Pitch(mm)/线数范围/Poles	3.5/N=02~22P		
使用温度范围/Operating temperature(C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /