
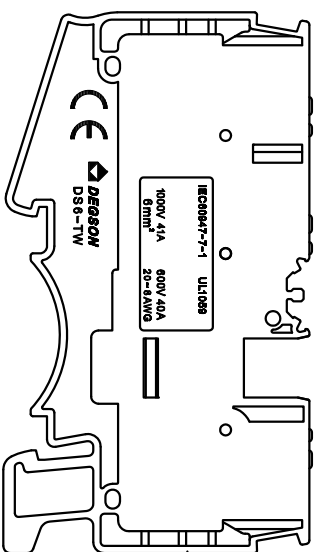


公差表/General Tolerances(mm)		0.1/10
0	>3	~
~	>6	~
3	10	~
~	18	~
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.50	±0.57	±0.80
±0.80	±1.00	±1.20
±1.50	±1.80	±2.50
±1.05	±1.15	±1.60
±2.20	±2.50	±2.50
±2	>500	~
±2	>10	>180
±2	>180	>250
±2	>250	>315
±2	>315	>400
±2	>400	>500
±2	>500	>630

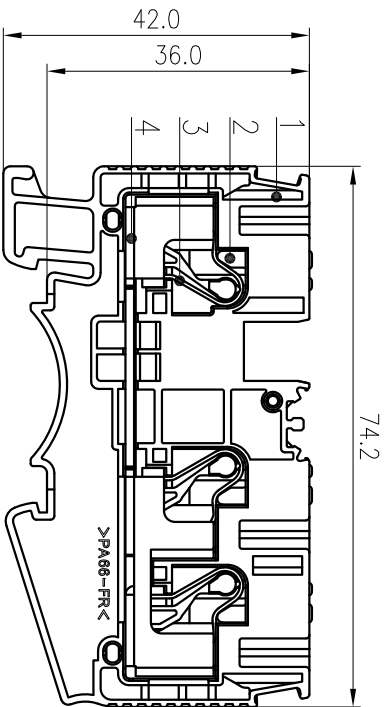

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600/40	/	/
IEC 标准/IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	1000/41	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.5~6,10(Sol)/20~8	/	/
间距/Pitch(mm)	8.2	/	/
剥线长度/Stripping length(mm)	10~12	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/

SURFACE: /

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	LI GL 2020.06.01
CHKD:	Moo J 2020.06.01
DRAWING NO.:	DS6-TW-01P-1Y-00A(H)
DRAFT:	Wang W 2020.06.01
TYPE:	CUSTOMER DRAWING

DEGSON® 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

4	Current Carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94 V-0
1	Housing	PA66	UL94 V-0

ITEM	NAME OF PART	MATERIAL	NOTES
REV	ECN	DESCRIPTION	DATE

SIZE: A4	SCALE: 1:1
1/1	1/1