
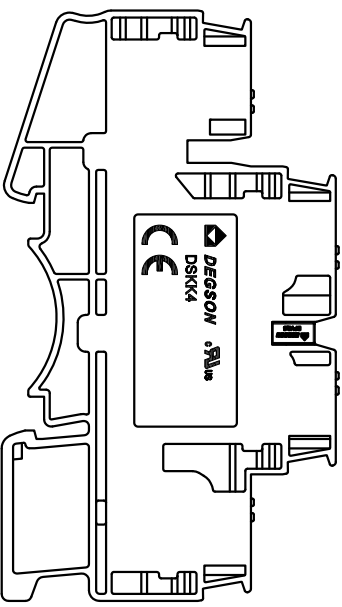


标注公差/General tolerances(mm)		公差/General tolerances(mm)										公差/General tolerances(mm)	
0	>3	7.5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	6	10	18	30	50	80	120	180	250	315	400	500	±Z
H0:12	H0:18	+0.22	+0.26	+0.31	+0.37	+0.57	+0.80	+0.93	+1.05	+1.15	+1.60	+2.20	+2.50

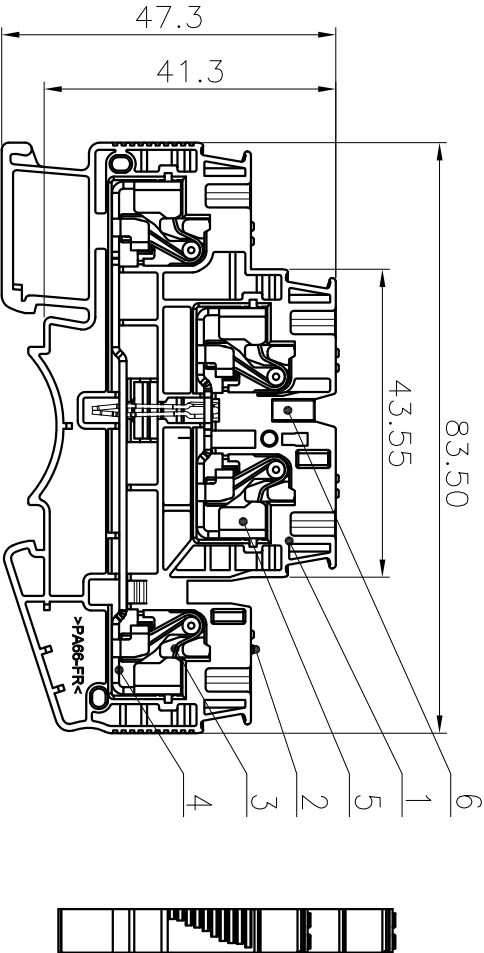

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/28	300/28	300/10
IEC 标准/IEC Standard:	III/3	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	500/32	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	6.0	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)	0.2~4&6(S0L)/24~10		
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	6.2		
间距/Pitch(mm)	11~13		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating temperature(°C)	Yes		
符合RoHS环保要求/Conform to RoHS			

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.04.02

CHKD: Mao J 2020.04.02

DRT:Wang LX 2020.04.02

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DSKK4-C02

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
6	DPV2.5		
5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				