
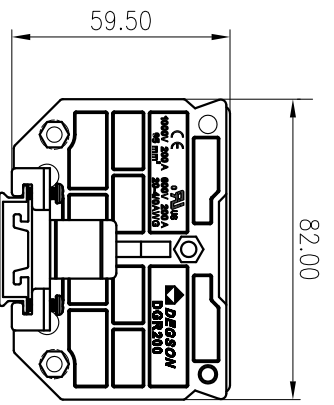
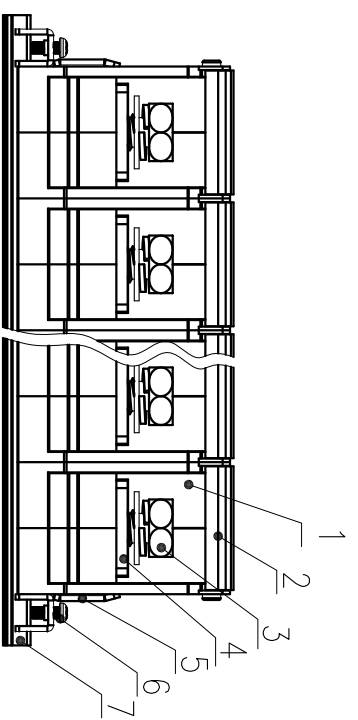


Pitch Range in mm		Nominal Dimension Range in mm					
Over	Over	Over	Over	Over	Over	Over	Over
6	10	10	30	60	100	150	0.1/1.0
TO	TO	TO	TO	TO	TO	TO	≤
6	10	24	30	60	100	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2'

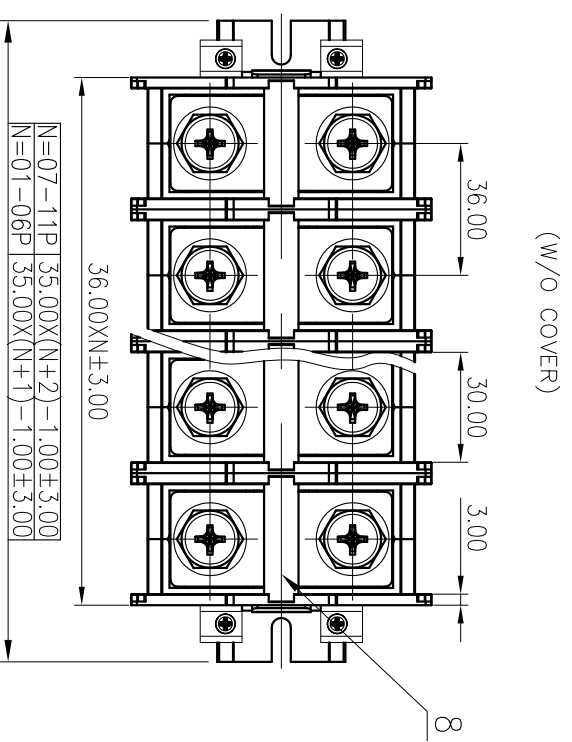

ITEM	NAME OF PART	MATERIAL	NOTES
8	TAG	PVC	UL94V-0
7	TRAMROAD	AL	
6	SCREWS	STEEL	M3/Zn PLATED
5	FASTENER	SPCC	Zn PLATED
4	CURRENT CARRIER	COPPER ALLOY	NI PLATED
3	SCREWS	STEEL	M10/Zn PLATED
2	COVER	PC	UL94V-2
1	HOUSING	PC	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	600/200	600/200	600/5
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	1000/230	1000/230	1000/230
额定扭矩/Torque Tightening(N·m/Lb.in)	M10: 9.0/80.00		
线径范围/Wire Range(AWG)	20~4/0		
间距/Pitch(mm)/线数范围/Poles	36.00/N=01~11P		
使用温度范围/Operating Temperature(°C)	-40~+125		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRFT: Yujin 2014.10.20

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 1:2

REV	ECN	DESCRIPTION	DRFT	DATE

1 2 3 4 5 6

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

DGR200-XXP-1Y-10A(H)

DRAWING NO.: DGR200-C01

REV TO

SHEET 1/1