

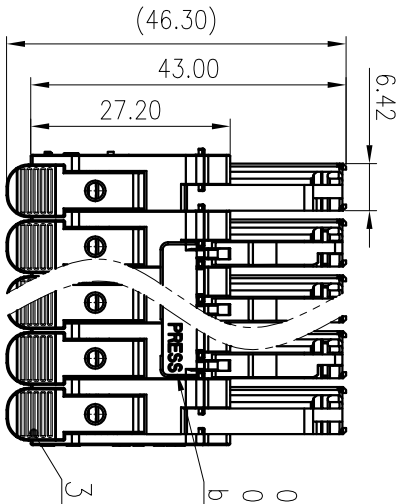
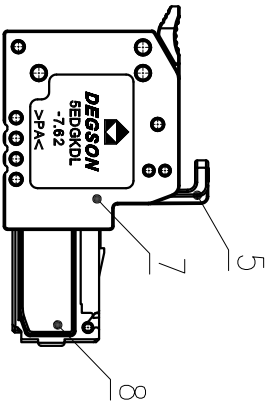
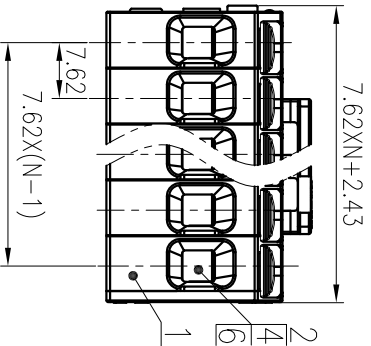


公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
UL Standard:													
B													
C													
D													

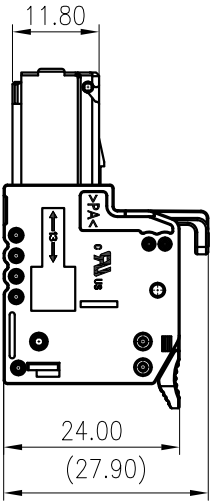

03P button for odd line
02P button for even line
button centered

UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	600/42	600/42	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等			
级/ Pollution Degree	III/3	III/2	II/2
额定电压/电压 (KV)/Rated Voltage(V)/Current(A)	800/41	1000/41	1000/41
额定脉冲电压 (KV)/Rate Impulse Voltage(KV)	8	8	8
额定脉冲电流 (KV)/Rate Impulse Current(KV)	8	8	8
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~6.10(sol)/20~8		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~12P		
剥线长度/Stripping length(mm)	11~13		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

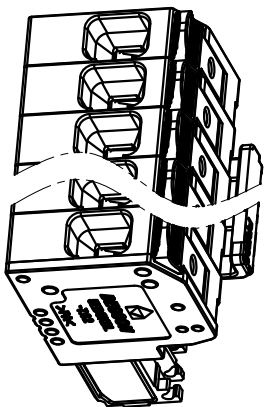

8	Cover2	PA66	UL94V-0
7	Cover1	PA66	UL94V-0
6	Clamp	Copper alloy	Sn Plated
5	Button	PBT+GF	UL94V-0
4	Slider	Stainless Steel	/
3	Lever	PA66+GF	UL94V-0
2	Spring	Stainless Steel	/
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

MATERIAL: / SURFACE: /

MAT NO.:

STATUS: /

APPD: LanChH 2021.10.26

CHKD: Yu JZh 2021.10.26

DRAFT: Gu RW 2021.05.26

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 10001349

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 2:1	REV	TO