







Pitch Range		In mm				Nominal Dimension				Range		In mm	
Over	Under	Over	Under	Over	Under	Over	Under	Over	Under	Over	Under	Over	Under
6	10	10	24	30	60	100	150	150	150	0.1	1.0		
TO	10	TO	24	TO	60	TO	100	TO	150				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±1.30				




ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
2	Side housing	PA66	UL94V-0
3	housing 1	PA66	UL94V-0
4	housing 2	PA66	UL94V-0
5	Clamp	Copper alloy	Sn plated
6	Spring	Stainless steel	

UL 标准/UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/151	150/151	300/710	
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2	
额定电压/电涌/Rated Voltage(V)/Current(A)	320/20	/	/	
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	4	/	/	
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/22~14			
剥线长度/Stripping length(mm)	5.00	N=02~24P		
使用温度范围/Operating temperature(°C)	9~10			
符合RoHS环保要求/Conform to RoHS	-40~+105	Yes		
标准颜色编号/Standard color number:	PANTONE 428C			

SURFACE: /	
MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	
CHKD:	

NAME:	
DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD	
8EDGKB-5.0-XXP-11-1001A(H)	

DRAWING NO:8EDGKB-5.0-1000-C02		REV	TO
DRAFT: JEX 2014.04.29			
TYPE: CUSTOMER DRAWING		SCALE: 1:1	SHEET 1/1

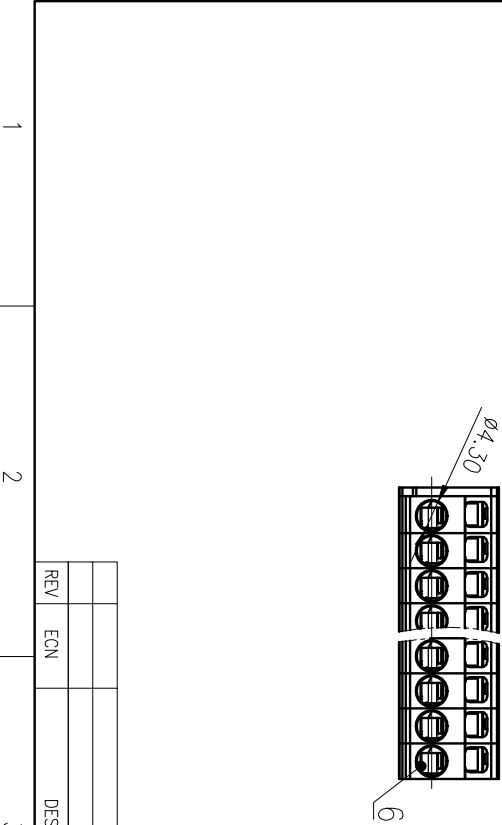

REV	ECN	DESCRIPTION	DRAFT	DATE