
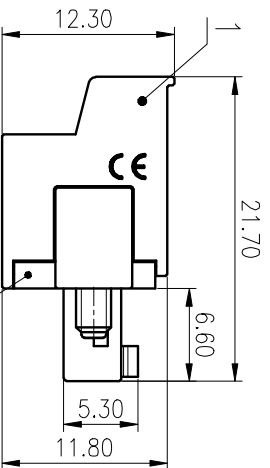
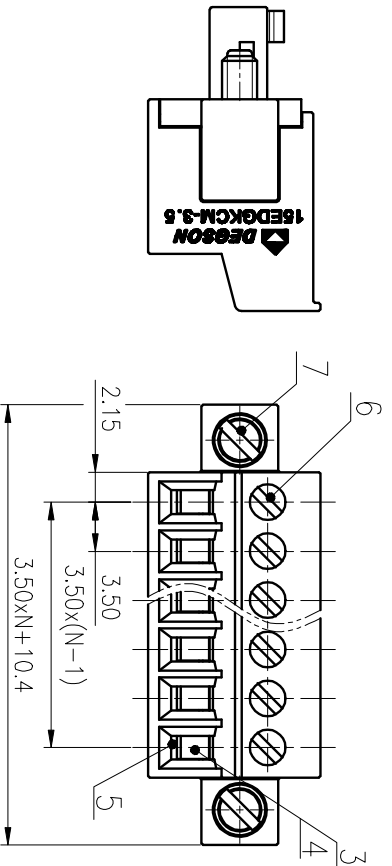


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±Z

2P-6P have the salient,
7P-24P have not the salient

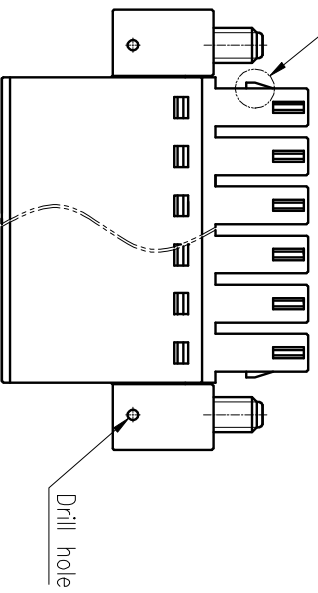

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Clamp	Copper alloy	Sn Plated
4	Block	Steel	Zn Plated
5	Cage	Steel	M2/Zn Plated
6	Screw1	Steel	M2/Zn Plated
7	Screw2	Steel	M2.5/Zn Plated

UL 标准/UL Standard:		B
额定电压/电涌/Rated Voltage(V)/Current(A)		300/10
IEC 标准/IEC Standard:		
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2	
额定电压/电涌/Rated Voltage(V)/Current(A)	250/8	
额定冲击电压(kV)/Rate Impulse Voltage(kV)	2.5	
额定扭矩/Torque Tightening(N·m/Lb·in)	M2, 0.2/1.77	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.5/30~16	
间距/Pitch(mm)/线数范围/Poles	3.5/N=02~24P	
剥线长度/Stripping length(mm)	6~7	
使用温度范围/Operating temperature(°C)	-40~+105	
符合RoHS标准/Conform to RoHS	Yes	

MATERIAL: SURFACE:

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGKCM-3.5-XXP-1Y-00A(H)

APPD: Lon CHH 2020.06.10
STATUS: /
CHKD: Yu JZh 2020.06.10
DRAFT: ZX 2017.03.29

DRAWING NO.: 15EDGKCM-3.5-C01

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 2:1	REV	SHEET
							T1	1/1

D C B A

1 2 3 4 5 6