
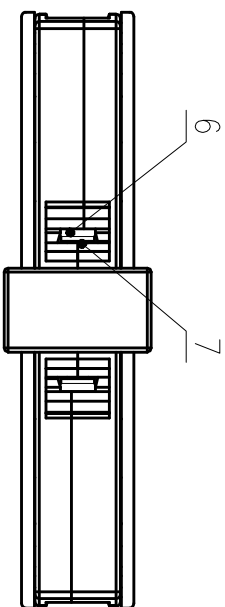

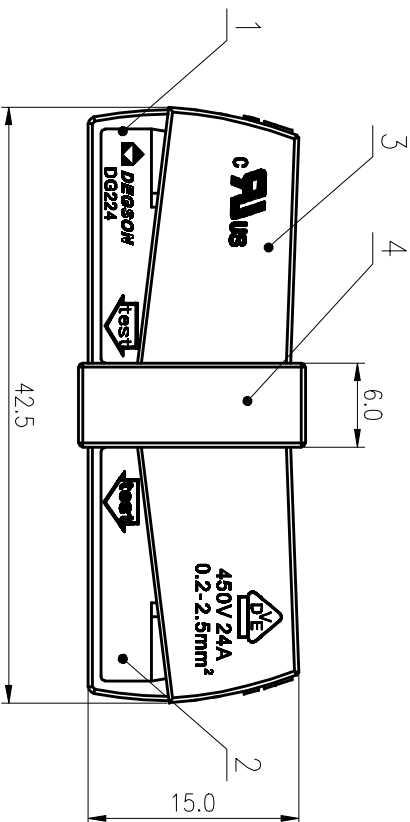


公差等级/General Tolerances(mm)		5										6	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±Z
~	3	6	10	18	30	50	80	120	180	250	315	400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	

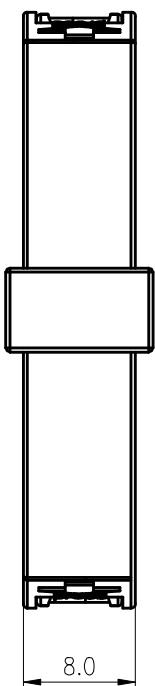

ITEM	NAME OF PART	MATERIAL	NOTES
7	Current carrier	Copper	Sn Plated
6	Current carrier	Copper	Sn Plated
5	Spring	Stainless Steel	
4	Housing Middle	PA66	UL94V-0
3	Cover	PA66	UL94V-0
2	Housing 2	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/22	/	300/10	
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级	/	III/2	/	
绝缘等级/Insulation Degree	/			
额定电压/电涌/Rated Voltage(V)/Current(A)	450/24	/		
工频耐压/Withstanding Voltage(V)/Min	AC2500	/		
线径范围(裸线剥线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~2.5/22~12			
厚度/Pitch(mm)/线径范围/Poles	8.00/01P			
剥线长度/Stripping length(mm)	9~11			
使用温度范围/Operating Temperature(°C)	-40~+105			
符合RoHS要求/Conform to RoHS	Yes			
标准颜色编号/Standard color number:				
PANTONE / RAL	/			

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.15
 CHKD: Mco J 2020.06.15
 DRT:Wang LX 2020.06.15
DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: **DG224-8.0-01P-1Y-00A(H)**

DRAWING NO.: DG224-8.0-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 REV T1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE

SIZE: A4
 (mm)
 (inch)

TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET 1/1