


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	±Z

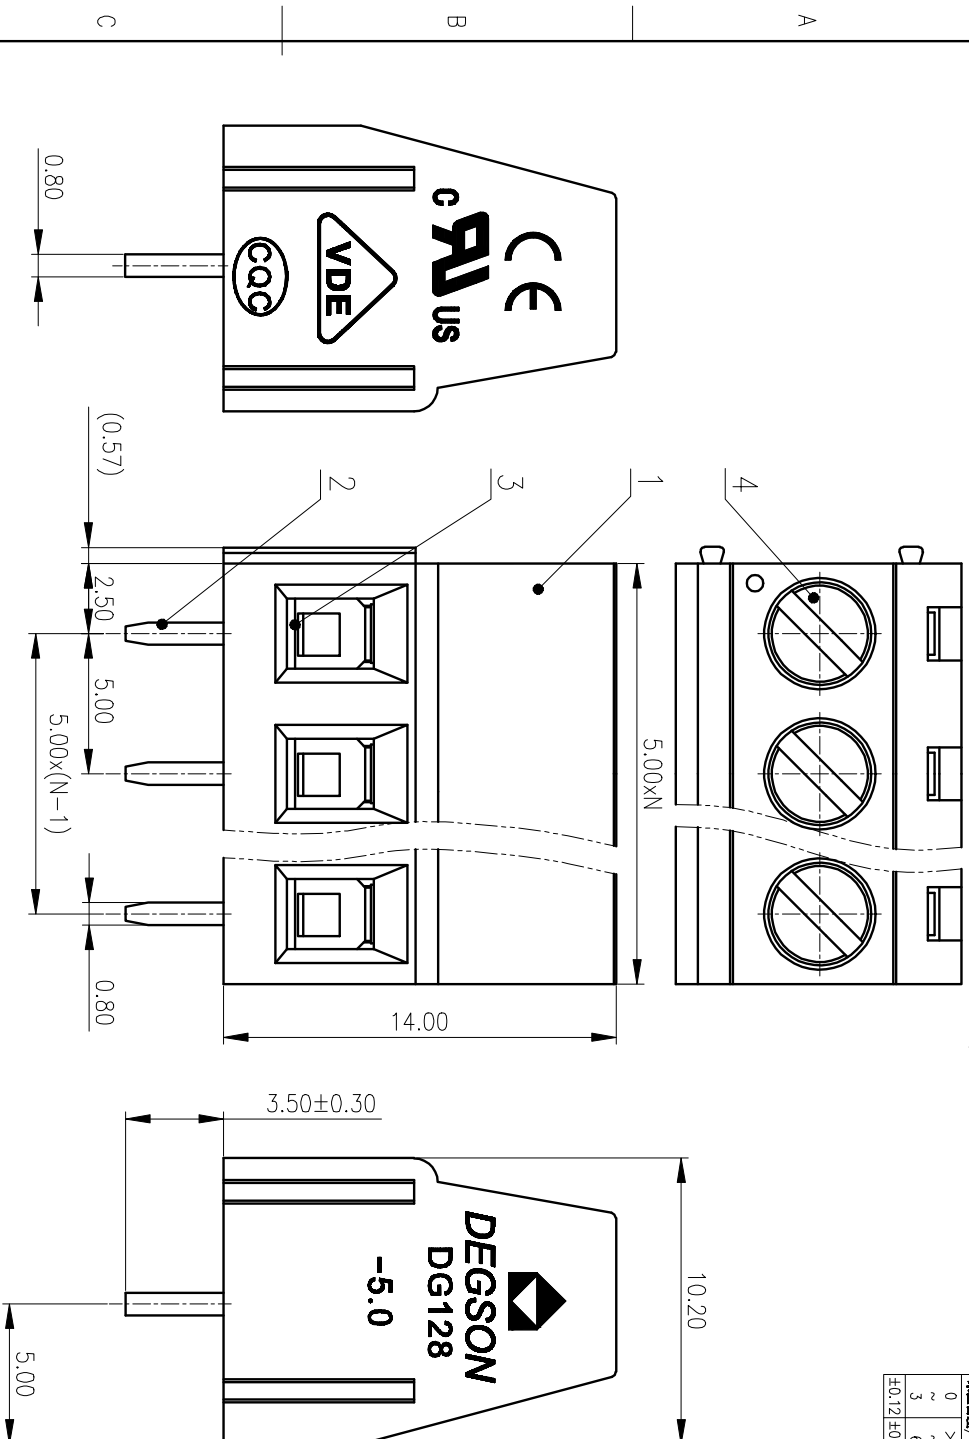

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M3/Zn Plated
3	Cage	Copper Alloy	M3/Ni Plated
2	Pin Header	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	250/18	/
工频耐压/Withstanding Voltage(V)/Trin	/	AC2000	/
线芯扭矩/Thread Tightening(N·m/Lbin)	M3, 0.5/4.43		
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/30~12		
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		
引线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	SURFACE: /
MAT NO.:	/
STATUS:	/

NAME:	NAME:
DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD	宁波高松电子有限公司
APPD: LiGL 2020.06.11	APPD: LiGL 2020.06.11
CHKD: Mek 2020.06.11	CHKD: Mek 2020.06.11
DRAFT: LuoXM 2020.06.11	DRAFT: LuoXM 2020.06.11
DRAWING NO.: DG128-5.0-C87	DRAWING NO.: DG128-5.0-XXP-1Y-1000A(H)
TYPE: CUSTOMER DRAWING	TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 4:1	SHEET
1							1/1

