


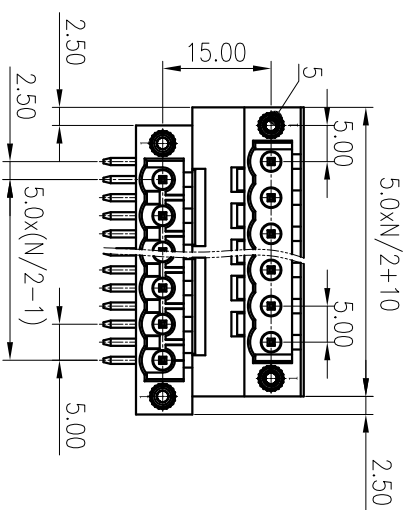



公差带/General Tolerances(mm)		公差带/General Tolerances(mm)	
0	>3	>10	>180
~3	~6	~18	~250
3	6	10	180
±0.12	±0.18	±0.22	±0.26
			±0.31
			±0.37
			±0.80
			±0.93
			±1.09
			±1.15
			±1.60
			±2.20
			±2.50
			±2



PCB LAYOUT

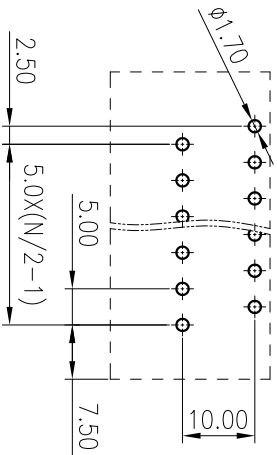

ITEM	NAME OF PART	MATERIAL	NOTES
5	Nut	Copper alloy	
4	Short Pin	Copper	Sn Plated
3	Long Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/15	/	300/10
VDE 标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/10	/
额定脉冲电压/Rate Impulse Voltage(KV)	/	4.0	/
间距/Pitch(mm)		5.08	
锁体式/One-block/拼接式/Inter locking		N=04~24P/N=24~48P	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /
SURFACE: /

MAT NO.: /
STATUS: /

APPD: LanChH 2020.06.01

CHKD: GongYzh 2020.06.01

DRAFT: ZHY 2020.06.01

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 10002219
SCALE: 1:1

TYPE: CUSTOMER DRAWING
REV: T0
SHEET: 1/1

REV	EON	DESCRIPTION	DRAFT	DATE
1	2	3	4	5