
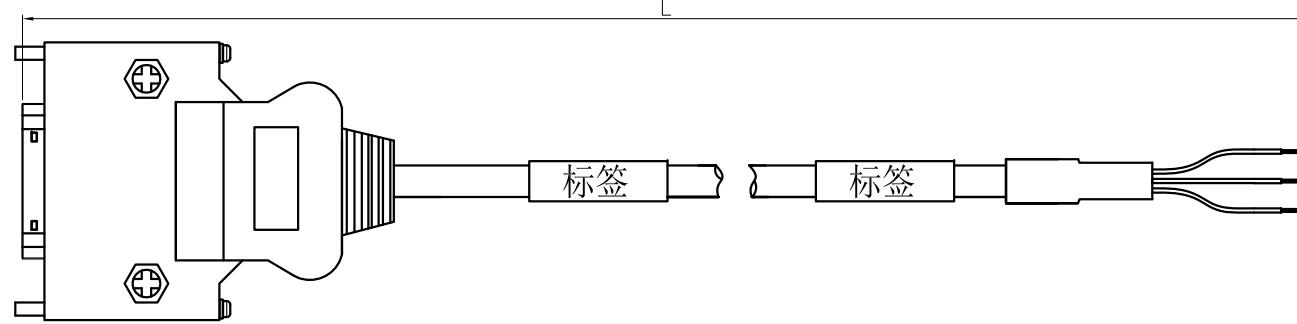


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



Wiring Diagram:

序号	1	2	3	4	5	6	7	8	9	10
颜色	橙黑1	橙红1	灰黑1	灰红1	白黑1	白红1	黄黑1	黄红1	桃黑1	桃红1
序号	11	12	13	14	15	16	17	18	19	20
颜色	橙黑2	橙红2	灰黑2	灰红2	白黑2	白红2	黄黑2	黄红2	桃黑2	桃红2
序号	21	22	23	24	25	26	27	28	29	30
颜色	橙黑3	橙红3	灰黑3	灰红3	白黑3	白红3	黄黑3	黄红3	桃黑3	桃红3
序号	31	32	33	34	35	36	37	38	39	40
颜色	橙黑4	橙红4	灰黑4	灰红4	白黑4	白红4	黄黑4	黄红4	桃黑4	桃红4
颜色	41	42	43	44	45	46	47	48	49	50
颜色	橙黑5	橙红5	灰黑5	灰红5	白黑5	白红5	黄黑5	黄红5	桃黑5	桃红5

Specifications	
Rated voltage	30V
Rated current	0.7A
Insulation resistance	≥ 100MΩ
Withstand voltage	500V AC
Temperature range	-25°C~+85°C
Withstand vltage	/

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: DX220-1DS-XX-00A(H)		
	CHKD:	TITLE: ASSEMBLY DRAWING		
	DRFT:	DRAWING NO.: 23000058	REV	
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE: 1:1