

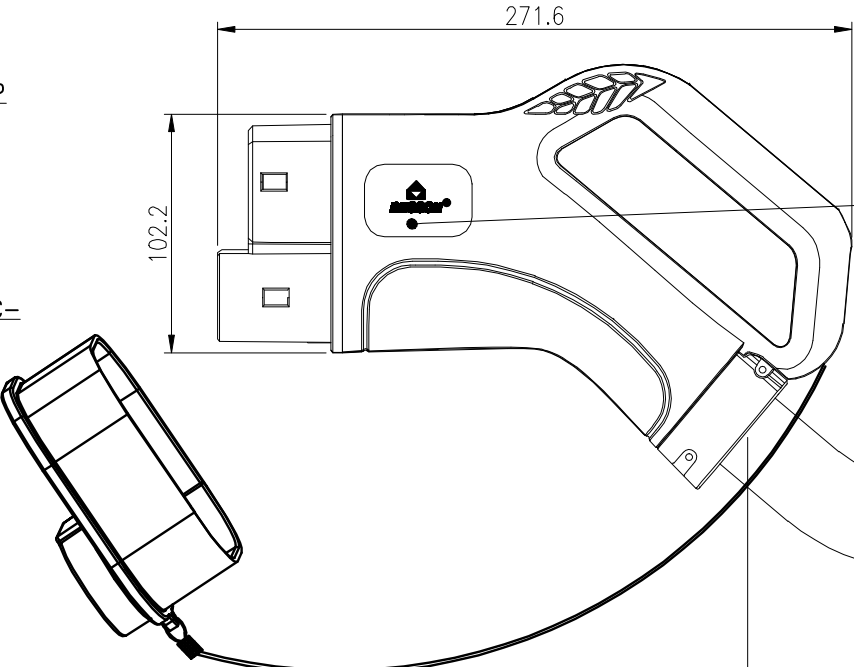


公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

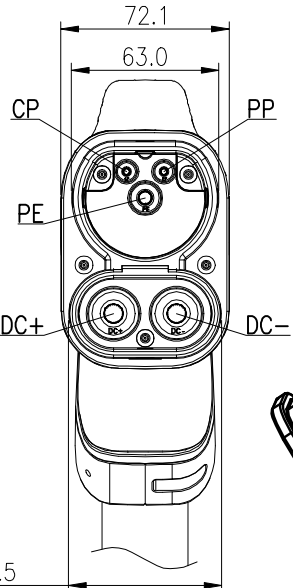


**Laser Printing Front Note:**  
  
**Laser Printing Back Note(Arial) :**  
**MEDC-T-200A-V-03-5.0M-30AH**  
**200A 1000V DC**  
**IEC 62196-3:2014**  
**IP54**  
**20xxxxxx-xxxx**



**Wiring diagram**

DC+	70mm <sup>2</sup>	<b>BROWN</b>
DC-	70mm <sup>2</sup>	<b>BLUE</b>
PE	35mm <sup>2</sup>	<b>YELLOW/GREEN</b>
RC		
PP		
CP	0.75mm <sup>2</sup>	<b>RED</b>
T1+	0.5mm <sup>2</sup>	<b>VIOLET</b>
T1-	0.5mm <sup>2</sup>	<b>BLACK</b>
T2+	0.5mm	<b>ORANGE</b>
T2-	0.5mm <sup>2</sup>	<b>GREEN</b>

RC=1500Ω±3%  
 A-A

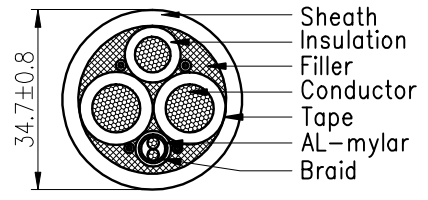

额定电压电流/Rated Voltage/Current	1000V DC;200A
绝缘电阻/Insulate Resistance	>500MΩ,1000V DC 1min
耐压/Withstanding Voltage	DC+, DC- and PE, 3500V AC 1min
	DC+ and DC- 3500V AC 1min PP and CP 1500V AC 1min
防护等级/Ingress Protection	IP54
插拔寿命/Insertion/Pullout Times	10,000 Times
插拔力/Insertion/Pullout Force	<100N
使用温度范围/Operating temperature(°C)	-30℃~+50℃
线材规格/Cable specification	2*70mm <sup>2</sup> +1*35mm <sup>2</sup> +P(2*0.75)+4*0.5 Black
标准/Reference standard	IEC 62196-3:2014
符合RoHS环保要求/Conform to RoHS	Yes

MATERIAL: /	SURFACE: /	
MAT NO.:	<b>宁波高松电子有限公司</b> <b>NINGBO DEGSON ELECTRICAL CO., LTD</b>	
STATUS: /		
APPD:	NAME: MEDC-T-200A-V-03-5.0M-30A(H)	
CHKD:		
DRFT:	DRAWING NO.:	REV DO-1
SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:3 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经本厂书面许可，否则，禁止复制或传播本文件内容。未经许可擅自复制或传播，侵权者将承担法律责任。本厂保留所有权利。