

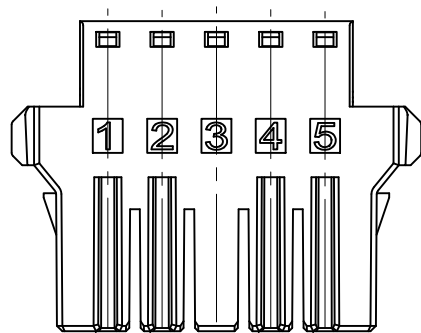
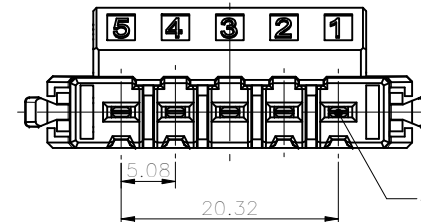
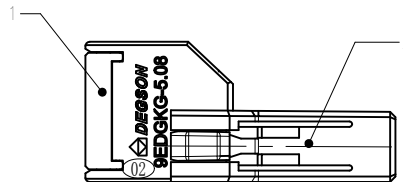
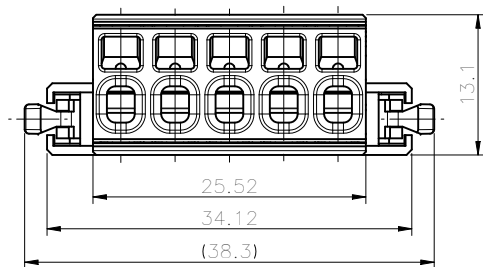



公差/General tolerances (mm)											D 0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

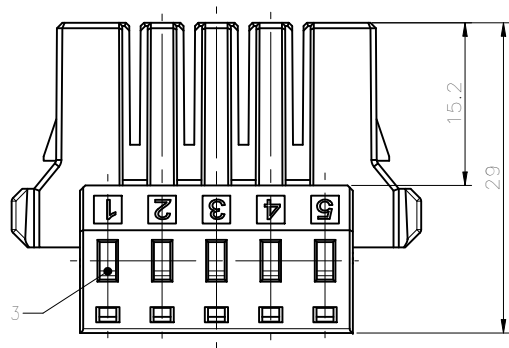

Application tool (optional) 02




Note:
The AZ(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
4	Clamp	Copper alloy	Ni Plated / Au Plated
3	Spring	Stainless steel	/
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/14.5	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	160/16	160/16	320/16
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	28-14 / 0.2-2.5		
剥线长度/Stripping length(mm)	8-9		
使用温度范围/Operating temperature(°C)	-40-105°C		
符合 RoHS 环保要求/Conform to RoHS	Yes		

DEGSON		MATERIAL:	SURFACE/COLOR:		
APPD: 兰春华	2022.08.23	MAT NO./REV: - / 01	MAT STATUS: 批量		
CHKD: 姜耀志	2022.08.23	NAME: 9EDCKG-5.08-05P-1Y-00A&Z(H)			
DRAFT: 周锡铸	2022.08.23	DRAWING NO. 200056718	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2:1
REV	ECN	DESCRIPTION	DRAFT	DATE	SHEET 1/1

02			周锡铸	2022.08.23
REV	ECN	DESCRIPTION	DRAFT	DATE



Transfer or duplication of this document as well as the utilization or reproduction of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent. 未经授权复制或传播本文件及其内容，或未经许可使用或复制其内容，均属侵权行为。DEGSON 保留所有权利。所有权利保留。DEGSON 保留所有权利。