


Aperçu

informations sur le produit

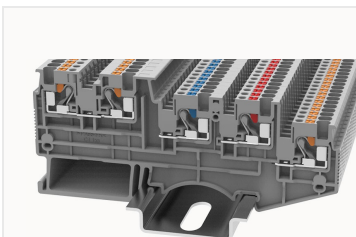

DSIO1.5/4-11040000248

Sensor terminal blocks, connector method: Push-in connector, Rated voltage : 250 V, Rated current : 13.5 A, Number of connectors: 5, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15

Les avantages des produits

- ☒ Sensor terminal blocks.
- ☒ Push-in connection technology, tool-free operation, more convenient and faster;
- ☒ With wire button, one word or cross screwdriver can release wire.
- ☒ Unique plug-in bridge, high circuit connection efficiency.
- ☒ Optional marker to avoid wire mis-inserting.
- ☒ Equipped with test holes for easy testing of the circuit.

Les certificats des produits



Caractéristiques techniques

Dessin de produit

Modèle 3D



Wiring data

Strip length	8~10mm
Conductor cross section solid	0.14~1.5mm ²
Conductor cross section flexible	0.14~1.5 mm ²
Conductor cross section solid AWG	26~14

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 105 °C (depending on derating curve)
---------------------------------	---

Relative humidity (storage/transport)	25%~75%
---------------------------------------	---------

IEC Electrical parameters

Rated voltage (III / 3)	250V
Rated surge voltage	4KV

Environmental protection

REACH SVHC	Lead 7439-92-1
RoHS	No excessive harmful substances

Dimension

NS 35/7,5 Height	41.5mm
End plate width	2.2mm
NS 35/15 Height	49mm
width	3.5mm
Height	34mm

Overview

Connection type	In line connection
Number of rows	1
number of connections	5
Open-end side panels	Yes
Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0

Accessoires

Marker

Top marker	ZSF3.5
Side marker	ZSF3.5

Marker support	/
----------------	---

Accessories

Slotted screwdriver size (Blade thickness x Width) mm	0.4x2.5
Bridge	DFBXX-3.5
End cover	D-DSIO1.5/4-1

Installation

End clamp	E-WS N / E-PC-1100A
Terminal strip marker support	KLM3-20x8 / KLM3-44x8 / DBE-1 / DBE-2
DIN rail	NS35/7.5-1000-00A(H)

Caractéristiques commerciales

Numéro de la commande	11040000248
Unité d'emballage	50
Quantité minimale de commande	50
Le poid de produit (sans emballage)	7.5