
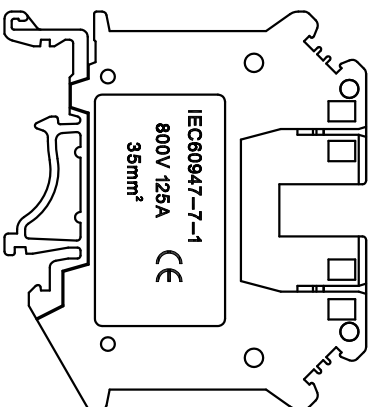
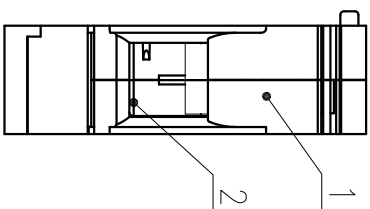
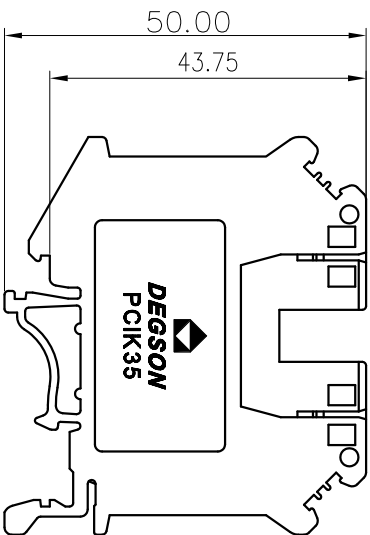


公差/General tolerances(mm)		公差/General tolerances(mm)										D	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±2
3	6	10	18	30	50	80	120	180	250	315	400	500	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

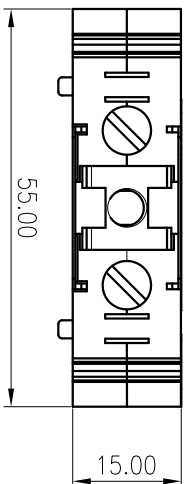

2	Ground contact	Copper Alloy	Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	600/85	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电压/Rated Voltage(V)/Current(A)	800/125	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
额定扭矩/Torque Tightening(N·m/Lb.in)	M6, 2.5/22.15	/	/
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AMG)	0.75~35/18~2/0	/	/
剥线长度/Stripping length(mm)	15.0	/	/
使用温度范围/Operating Temperature(°C)	-40~+105	/	/
符合RoHS环要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/

MATERIAL: SURFACE: /

MAT NO.: /

STATUS: /

APPD: LI GL 2020.06.04

CHKD: Mao J 2020.06.04

DRT: Feng X 2020.05.28

NAME: **DEGSON**® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: PCIK35-01P-1Y-00A(H)

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 1:1	SHEET 1/1
-----	-----	-------------	-----	------	----------	------------	-----------